Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

CUST. NAME	N0037	DATE	JUN.06,02'
DESCRIPTION	Toroidal Coil Inductors	TYPE	
GS PART NO.	GSTCV6852A-250K	DWG. NO.	015502
CUST. PART NO.	542-5702	CUST. DWG. NO.	

DIM	Unit in mm
A	22.22(max)
B	11.09(max)
C	15.0±1.0
D	1.0 ±0.05
E	
F	
G	
H	
I	
J	
K	
L	
M	
N	

MECHANICAL MEASUREMENTS

Jameco Part Number 208266

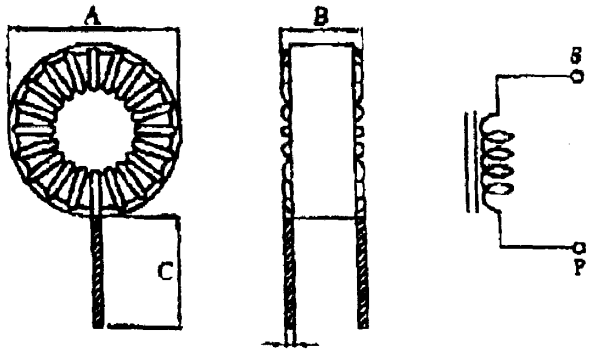

C:TINNED.

ELECTRICAL MEASUREMENTS & TEST EQUIPMENT

NO.	L (uH) @1KHz/0.25V	L (uH) +IDC @1KHz/0.25V	SRF(min) MHz	RDC(max) (Ω)	IDC(max) (A)
EQU.	CH-101	CH-101 CH 1320	HM 9460	GOM-801G	CH 1320
SPE.	25±10%	12.0(min)		0.015	5.5
1	25.6	20.1		0.012	
2	25.8	20.1		0.012	
3	25.7	20.0		0.011	
4	25.8	20.0		0.012	
5	25.6	20.1		0.012	
6					
7					
8					
9					
10					

Remark :

CT39(OR EQUI.)
CORE: T68-52A
WIRE: 1.0φ 2UEW NY
TURN: 22Ts(IN REF.)
耐熱膠布：6mmx130mm.
※ VARNISH.

DRAW BY: 6/7'02

APPROVED BY: 6/7'02